

## KEY FEATURES

- Switching Power Module for PCB Mountable
- Fully Encapsulated Plastic Case
- Universal Input Range 90-264VAC, 47-440 Hz
- Regulated Output and Low Ripple and Low Noise
- Isolation Class II
- -40°C Starting
- CE, CB, UL Approval
- 3-Year Product Warranty



## ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

| Model No. ( Single Output )                  | ASC-3.3S  | ASC-5S   | ASC-12S  | ASC-15S | ASC-24S |
|--|---|----------|----------|---------|---------|
| Max Output Wattage (W)                       | 20W   | 30W      | 30W      | 30W     | 30W     |
| Input  | Voltage   |          |          |         |         |
|  | 90-264 VAC or 120-370 VDC   |          |          |         |         |
|  | Frequency (Hz)  |          |          |         |         |
|  | 47-440 Hz   |          |          |         |         |
|  | Current (Full load)   |          |          |         |         |
|  | 520 mA max. (115 VAC) / 320 mA max. (230 VAC)                         |          |          |         |         |
| Inrush Current (<2ms)                        |   |          |          |         |         |
| 23 A max. (115 VAC) / 46 A max. (230 VAC)    |   |          |          |         |         |
| Leakage Current                              |   |          |          |         |         |
| 0.75 mA max.                                 |   |          |          |         |         |
| External Fuse (recommend)                    |   |          |          |         |         |
| 1.5 A slow blow type                         |   |          |          |         |         |
| Output                                       | Voltage (V.DC.)   |          |          |         |         |
|  | 3.3V  | 5V       | 12V      | 15V     | 24V     |
|  | Voltage Accuracy  |          |          |         |         |
|  | ±2%   |          |          |         |         |
|  | Current (mA) max  |          |          |         |         |
|  | 6000  | 6000     | 2500     | 2000    | 1250    |
|  | Line Regulation (LL-HL) (typ.)  |          |          |         |         |
|  | ±1%   |          |          |         |         |
|  | Load Regulation (8-100%) (typ.)                                       |          |          |         |         |
|  | ±1%   |          |          |         |         |
|  | Minimum Load  |          |          |         |         |
| 5%   | 8%  | 2%       | 2%       | 2%      |         |
| Maximum Capacitive Load (at 230VAC)          |   |          |          |         |         |
| 80000 uF                                     | 70000 uF  | 14000 uF | 11000 uF | 5900 uF |         |
| Ripple                                       |   |          |          |         |         |
| <0.2% Vout +40mV max (Vp-p)                  |   |          |          |         |         |
| Noise  |   |          |          |         |         |
| <0.5% Vout +50mV max (Vp-p)                  |   |          |          |         |         |
| Efficiency                                   |   |          |          |         |         |
| 75%  | 79%   | 82%      | 82%      | 82%     |         |
| Hold-up Time                                 |   |          |          |         |         |
| 15 ms min.                                   |   |          |          |         |         |
| Protection                                   | Over Power Protection   |          |          |         |         |
|  | Hiccup technique, auto-recovery                                       |          |          |         |         |
|  | Over Voltage Protection   |          |          |         |         |
| Zener diode clamp                            |   |          |          |         |         |
| Short Circuit Protection                     |   |          |          |         |         |
| Hiccup mode, indefinite (automatic recovery) |   |          |          |         |         |
| Isolation                                    | Input-Output (V.AC)   |          |          |         |         |
| 3000 V                                       |   |          |          |         |         |
| Environment                                  | Operating Temperature   |          |          |         |         |
|  | -40°C...+70°C (with derating)   |          |          |         |         |
|  | Storage Temperature   |          |          |         |         |
|  | -40°C...+85°C   |          |          |         |         |
|  | Temperature Coefficient   |          |          |         |         |
| ±0.02%/°C                                    |   |          |          |         |         |
| Humidity                                     |   |          |          |         |         |
| 95% RH                                       |   |          |          |         |         |
| MTBF   |   |          |          |         |         |
| >200,000 h @ 25°C (MIL-HDBK-217F)            |   |          |          |         |         |
| Physical                                     | Dimension (L x W x H)   |          |          |         |         |
|  | 3.52 x 2.52 x 0.98 Inches ( 89.5 x 64.1 x 25.0 mm ) Tolerance ±0.5 mm |          |          |         |         |
|  | Case Material   |          |          |         |         |
|  | Plastic resin (flammability to UL 94V-0)                              |          |          |         |         |
| Weight                                       |   |          |          |         |         |
| 212 g  |   |          |          |         |         |
| Cooling Method                               |   |          |          |         |         |
| Free air convection                          |   |          |          |         |         |
| Safety                                       | Agency Approvals  |          |          |         |         |
| UL/cUL, CE, CB                               |   |          |          |         |         |
| EMC  | EMI (Conducted & Radiated Emission)                                   |          |          |         |         |
|  | EN 55022 class B  |          |          |         |         |
| EMS (Noise Immunity)                         |   |          |          |         |         |
| EN 55024                                     |   |          |          |         |         |

**ELECTRICAL SPECIFICATIONS**

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

| Model No. (Dual / Triple Output) | ASC-5D                              | ASC-12D   | ASC-15D   | ASC-5S12S | ASC-5S12D       | ASC-5S15D        |   |
|----------------------------------|-------------------------------------|---|-----------|-----------|-----------------|------------------|---|
| Max Output Wattage (W)           | 30W                                 | 30W   | 30W       | 30W       | 30W             | 30W              |   |
| Input                            | Voltage                             |   |           |           |                 |                  | 90-264 VAC or 120-370 VDC                     |
|                                  | Frequency (Hz)                      |   |           |           |                 |                  | 47-440 Hz                                     |
|                                  | Current (Full load)                 |   |           |           |                 |                  | 520 mA max. (115 VAC) / 320 mA max. (230 VAC) |
|                                  | Inrush Current (<2ms)               |   |           |           |                 |                  | 23 A max. (115 VAC) / 46 A max. (230 VAC)     |
|                                  | Leakage Current                     |   |           |           |                 |                  | 0.75 mA max.                                  |
|                                  | External Fuse (recommend)           |   |           |           |                 |                  | 1.5 A slow blow type                          |
| Output                           | Voltage (V.DC.)                     | ±5V   | ±12V      | ±15V      | 5/12            | 5/±12            | 5/±15   |
|                                  | Voltage Accuracy                    | ±5%   |           |           | ±2% / ±5%       |                  |   |
|                                  | Current (mA) max                    | ±3000   | ±1250     | ±1000     | 3000/1250       | 3000/±630        | 3000/±500                                     |
|                                  | Line Regulation (LL-HL) (typ.)      | ±1%   |           |           | ±1% / ±5%       |                  |   |
|                                  | Load Regulation (20-100%) (typ.)    | ±3%   |           |           | ±2% / ±6%       |                  |   |
|                                  | Minimum Load                        | 2%  | 3%        | 1%        | 20%             | 20%              | 20%   |
|                                  | Maximum Capacitive Load (at 230VAC) | ±50000 uF   | ±14000 uF | ±10000 uF | 13200 / 6400 uF | 15000 / ±5400 uF | 10000 / ±3200 uF                              |
|                                  | Ripple                              | <0.2% Vout +40mV max (Vp-p)   |           |           |                 |                  |   |
|                                  | Noise                               | <0.5% Vout +50mV max (Vp-p)   |           |           |                 |                  |   |
|                                  | Efficiency                          | 79%   | 82%       | 80%       | 79%             | 79%              | 78%   |
|                                  | Hold-up Time                        | 15 ms min.  |           |           |                 |                  |   |
| Protection                       | Over Power Protection               | Hiccup technique, auto-recovery                                       |           |           |                 |                  |   |
|                                  | Over Voltage Protection             | Zener diode clamp   |           |           |                 |                  |   |
|                                  | Short Circuit Protection            | Hiccup mode, indefinite (automatic recovery)                          |           |           |                 |                  |   |
| Isolation                        | Input-Output (V.AC)                 | 3000 V  |           |           |                 |                  |   |
| Environment                      | Operating Temperature               | -40°C...+70°C (with derating)   |           |           |                 |                  |   |
|                                  | Storage Temperature                 | -40°C...+85°C   |           |           |                 |                  |   |
|                                  | Temperature Coefficient             | ±0.02%/°C   |           |           |                 |                  |   |
|                                  | Humidity                            | 95% RH  |           |           |                 |                  |   |
|                                  | MTBF                                | >200,000 h @ 25°C (MIL-HDBK-217F)                                     |           |           |                 |                  |   |
| Physical                         | Dimension (L x W x H)               | 3.52 x 2.52 x 0.98 Inches ( 89.5 x 64.1 x 25.0 mm ) Tolerance ±0.5 mm |           |           |                 |                  |   |
|                                  | Case Material                       | Plastic resin (flammability to UL 94V-0)                              |           |           |                 |                  |   |
|                                  | Weight                              | 212 g   |           |           |                 |                  |   |
|                                  | Cooling Method                      | Free air convection   |           |           |                 |                  |   |
| Safety                           | Agency Approvals                    | UL/cUL, CE, CB  |           |           |                 |                  |   |
| EMC                              | EMI (Conducted & Radiated Emission) | EN 55022 class B  |           |           |                 |                  |   |
|                                  | EMS (Noise Immunity)                | EN 55024  |           |           |                 |                  |   |

**NOTE**

1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. It's necessary Varistor 14S471K at L / N input side in parallel.
3. It's necessary 10R / 15φ thermistor at L input side in series connection.
4. The triple output required a minimum 20% loading on the output to maintain specified regulation.

Operation under no-load condition will not damage these devices; however they may not meet all listed specification.

5. Load regulation for triple output:

Main output (V1): 20% to 100% with 20% to 100% balanced on auxiliaries.

Auxiliary outputs (V2 and V3): 20% to 100% balanced on all outputs.


6. Cross regulation for triple output:

Main output 100% load, auxiliary 100%, other auxiliary 25% to 100%.


Auxiliary outputs (V2 and V3): Main output 100% load, auxiliary 100%,

other auxiliary 25% to 100% or main output 25%, auxiliary 25%, other auxiliary 25% to 100%.

7. Please refer to our PDF file "AC-DC Application" on our website: [www.archcorp.com.tw](http://www.archcorp.com.tw)

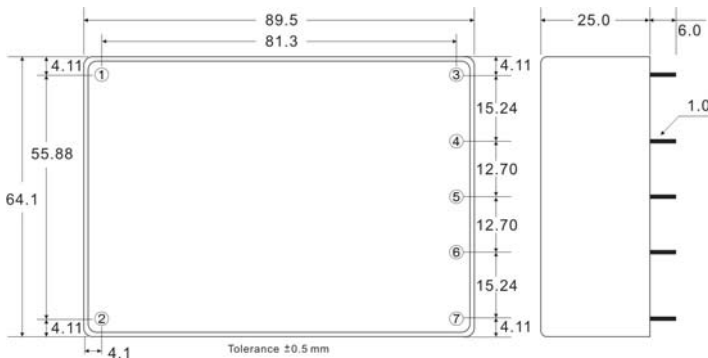
**MECHANICAL DIMENSION ( Top View )**


| PIN# | Single    | Dual      | 5S/12S    | Triple    |
|------|-----------|-----------|-----------|-----------|
| 1    | AC IN (N) | AC IN (N) | AC IN (N) | AC IN (N) |
| 2    | AC IN (L) | AC IN (L) | AC IN (L) | AC IN (L) |
| 3    | +DC OUT   | +DC OUT   | +12V OUT  | +DC OUT   |
| 4    | NO PIN    | NO PIN    | +5V OUT   | +5V OUT   |
| 5    | -DC OUT   | COMMON    | +12V RTN  | COMMON    |
| 6    | NO PIN    | NO PIN    | +5 VRTN   | +5V RTN   |
| 7    | NOCONNECT | -DC OUT   | NO PIN    | -DC OUT   |

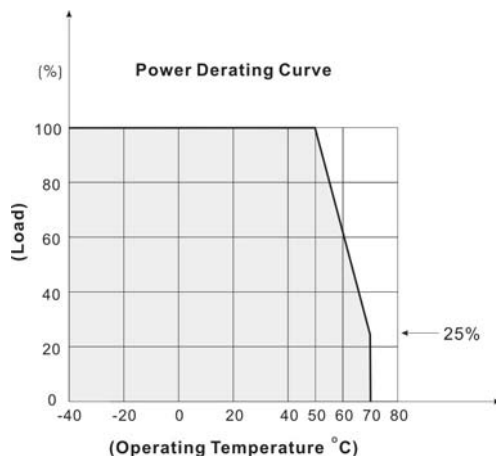
**DERATING**


**BLOCK DIAGRAM**

Single Output

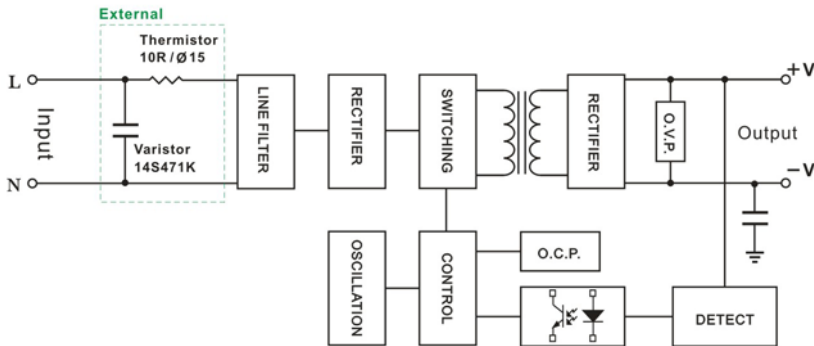

Dual Output

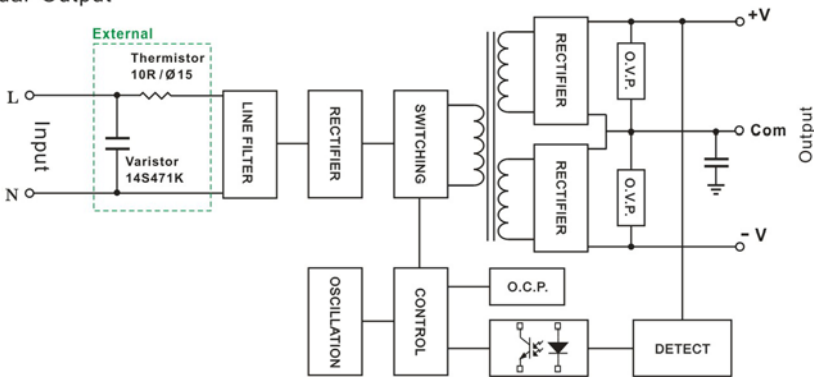

Triple Output

