



FST30 SERIES

ENCAPSULATED DC/DC CONVERTER

30WATTS



Features

- High Efficiency
- 2:1 Input Range
- Six-sided Continuous Shield
- Standard Package & Pin Out
- Remote ON/OFF Control
- Fully Encapsulated Module

ELECTRICAL SPECIFICATIONS

Measured at 25°C with the condition of V_{in} = Nominal and Full Load. Specifications subject to change without notice.

Model No. (Single Output)	FST30S2.5/24	FST30S3.3/24	FST30S5/24	FST30S12/24	FST30S15/24	FST30S24/24
Max Output Wattage (W)	15W	19.8W	30W	30W	30W	30W
Input Voltage (VDC)	24V (18-36)	24 (18-36)	24V (18-36)	24V (18-36)	24V (18-36)	24V (18-36)
Output Voltage (VDC)	2.5V/6000mA	3.3V/6000mA	5V/6000mA	12V/2500mA	15V/ 2000mA	24V/ 1250mA
Efficiency (%)	84%	87%	90%	88%	88%	88%
Capacitor Load(max)	6800 μ F	6800 μ F	4700 μ F	680 μ F	680 μ F	120 μ F
Minimum Load	0%	0%	0%	1%	1%	0.5%

Model No. (Single Output)	FST30S2.5/48	FST30S3.3/48	FST30S5/48	FST30S12/48	FST30S15/48	FST30S24/48
Max Output Wattage (W)	15W	19.8W	30W	30W	30W	30W
Input Voltage (VDC)	48V (36-75)	48V (36-75)	48V (36-75)	48V (36-75)	48V (36-75)	48V (36-75)
Output Voltage (VDC)	2.5V/6000mA	3.3V/6000mA	5V/6000mA	12V/2500mA	15V/ 2000mA	24V/ 1250mA
Efficiency (%)	85%	88%	90%	88%	88%	88%
Capacitor Load(max)	6800 μ F	6800 μ F	4700 μ F	680 μ F	680 μ F	120 μ F
Minimum Load	0%	0%	0%	1%	1%	0.5%

INPUT SPECIFICATIONS

Input Filter	π Filter
--------------	--------------

OUTPUT SPECIFICATIONS

Voltage Accuracy	$\pm 2\%$
Line Regulation(LL-HL)typ	$\pm 0.5\%$
Load Regulation(10-100%)typ	$\pm 1\%$
Trim	$\pm 10\%$
Switching Frequency	400kHz
Ripple & Noise (V_{pk-pk})	100mV
	0.5%

PROTECTION

Output Power Protection	Works over 120% of rating and recovers automatically
Output Voltage Protection	Zener Diode Clamp
Short Circuit Protection	Hiccup mode, auto-recovery

1. Output Ripple & Noise are measured at 20MHz of bandwidth with a 0.1 μ F & 47 μ F parallel capacitors

ISOLATION


Voltage	1600VDC input to output
Resistance	10 ⁹ ohms input to output
Capacitance	1000pF input to output

ENVIRONMENT

Operating Temperature	-40C to +85C (with derating, see Figure 1)
Storage Temperature	-55C to +105C
Case Temperature	+105C max.
Temperature Coefficient	±0.02%/C
Humidity	95% RH
MTBF	>550,000 h @ 25C (MIL-HDBK-217F)

PHYSICAL

Dimensions (L×W×H)	2.0 x 1.0 x 0.43 inches (50.8 x 25.4 x 11.0 mm)
Weight	33 grams, 1.16 ozs
Case Material	Five-sided shielding Aluminum with Non-Conductive base, Black Anodize
Cooling Method	Free air convection

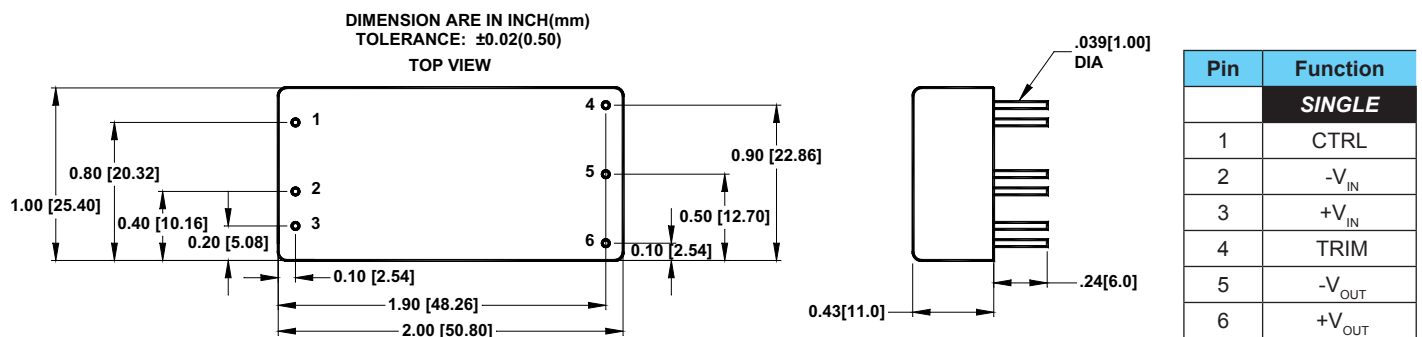

Mechanical Specifications

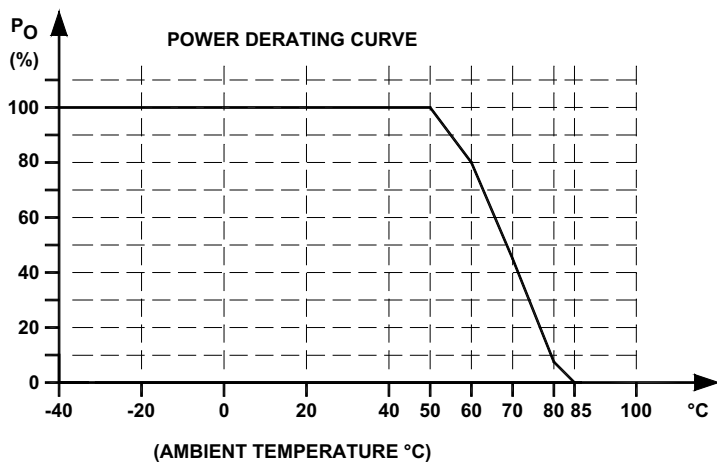


Figure 1. Power Derating Curve

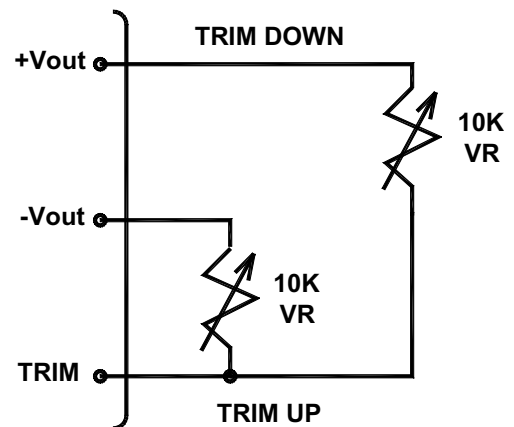


Figure 2. Remote ON/OFF Control & Trim